

Features

- No Daily Calibration Required
- Auto Discrimination of Symbologies
- LEDs Display ANSI Grade & Bar Tolerance
- Center Scan Key
- N.I.S.T. Traceable
- Element Detail Analysis
- ANSI & Traditional Grading
- One touch "Hot" keys for Help, Print, and UPC Mag
- Custom Program Options Available
- Corrugated Option - adjusts Symbol Contrast per Fibre Box Association guidelines



Stratix Combines Ease-of-Use & Pinpoint Accuracy

Making sure your bar codes are scannable is a crucial part of today's business. Avoid mistakes, damaged customer relationships, or even costly fines. Stratix makes verification easier and more accurate than ever before, with the new Xaminer Elite series bar code verifiers. Whether you must verify one-dimensional or two-dimensional (PDF-417 & GS1 DataBar) symbologies, there's an Xaminer Elite model that's right for your business — and your budget!

Bar Code Verification in a Simple Integrated Unit

The Xaminer Elite Wand, Elite IS, Elite IS Plus & Elite IS Point & Shoot bar code verifiers from Stratix give you the industry's highest quality bar code verification for either one-dimensional or two-dimensional (GS1 DataBar and PDF - 417) bar codes — all in a single unit. The Xaminer Elite IS and Elite IS Plus come standard with a fully integrated laser scanner. No more cables to snag or cords to tangle. For additional flexibility and industry-specific applications, the Xaminer Elite IS and Elite IS Plus can have a 6, 10, or 20 mil wand added. The Xaminer Elite Wand is ideal when you need quality verification equipment at the best price.


Maximize Your Investment

As your verification needs change, so can your Xaminer Elite verifier. All Xaminer Elite verifiers come equipped with expandable firmware allowing for wand or integrated scan engine upgrades in the future. As your needs for bar code symbologies change, so can your Xaminer Elite verifier with a simple software and/or hardware upgrade from the Stratix Service Department. The Xaminer Elite is a verifier that will truly meet all of your verification needs today and tomorrow.

Calibration Check Routine

Need to make sure your verifier investment is operating properly? Only Stratix Elite IS and Elite IS Plus verifiers ship with a calibration check routine that will allow an operator to check calibration in under 30 seconds, right at your worksite!

Specifications

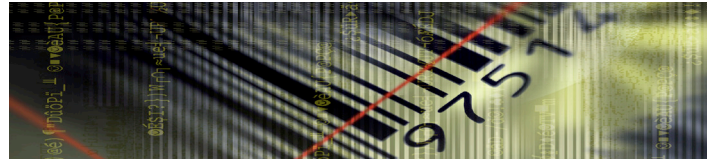

Xaminer Elite Verifier Models

9010-6 Xaminer Elite Wand

Full ANSI
Includes: 6 mil wand, 4 AA Batteries, User's Manual and Training Video CD

9015 Xaminer Elite IS Point & Shoot (integrated laser)

Partial ANSI
Includes: 4 AA Batteries, User's Manual and Training Video CD

9020 Xaminer Elite IS (integrated laser)

Dual ANSI - Full ANSI and Partial ANSI Grading
Includes: AC Adapter, PC Communications Cable, UPC-A Calibration Check Card, Table Top Stand, User's Manual and Training Video CD

9030 Xaminer Elite IS Plus (integrated laser)

Dual ANSI - Full ANSI and Partial ANSI Grading
Includes: AC Adapter, PC Communications Cable, UPC-A Calibration Check Card, Table Top Stand and User's Manual and Training Video CD

Symbologies Verified

Elite Wand:

UPC-A Addendum 2,5 (GTIN 12)
UPC-E Addendum 2,5 (GTIN 12)
EAN-8 (GTIN 8)
EAN-13 Addendum 2,5 (GTIN 13)
Code 128

Standard AIM
UCC/EAN SCC-14 (GTIN 14), SSCC-18

Coupon Code (UPC-A with GS1 128 coupon extended code)
Code 39

Interleaved 2 of 5 (ITF)
Case Code SCC-14 (GTIN 14)

Code 93
Codabar

Elite IS & Elite IS Point & Shoot:

All symbologies plus: Pharma Code

Elite IS Plus:

All symbologies plus: PDF-417 Standard, GS1 DataBar Family (Limited, Stacked, Truncated, Stacked Omni-Directional, Omni-Directional, Expanded, & Expanded Stacked), Composite Symbology (CC-A, CC-B, & CC-C), and Coupon Code (UPC-A with GS1 DataBar Expanded and GS1 DataBar Expanded only)

1D Laser Scanner (Elite IS, IS Point & Shoot, & IS Plus)

Light Source: 650nm visible laser diode
Scan Angle: 40° ± 2°
Scan Patterns: Linear
Minimum Print contrast: 20% absolute dark/light reflectance

Performance Characteristics

CPU: Motorola Coldfire
Operating System: Proprietary
Memory: 8MB (250 Scans)
Interface/Communications: Serial RS232

Physical Characteristics

Dimensions: 3.25 in.D x 3.75in. H 82.55mm D x 95.25mm W x 203.2mm H
Weight: 14oz (400grams)
Display: LCD, 128 x 64 (8 rows x 20 columns)
Power: 4 AA batteries or AC 110v Power Supply
Notification: LEDs for ANSI grade & Bar Tolerance
Keypad: 22 Key Numeric

Wand Specs

Light Source: 660nm
Visible Red Light
6,10, and 20 mil apertures

Environmental

Operating Temperature: 14°-122° F
Storage Temperature: -40°-158° F
Relative Humidity: 0% to 85% relative humidity, non-condensing
Sealing Specification: IP42

Software

Stratix Verification Software (SVS) Part # 7309
(single user license)

Accessories

Wands:

6 mil Part# 6
10 mil Part# 10
20 mil Part# 20

Printers:

Dot Matrix Part# 6613
Direct Thermal Part# STXTECDTP

Paper/Ribbon:

One-Ply Dot Matrix Printer Paper Part # 6715
Two-Ply Dot Matrix Printer Paper Part # 6716
Dot Matrix Printer Ribbon Part # 6714
One-Ply Direct Thermal Printer Paper Part # 6708

Cases:

Protective Carry Case Part # V6158BCS
Shoulder Harness Part # 10038
Belt Holster Part # 10039

Stands:

Table Top Stand Part # 10046

Power:

AC Adapter Part # 10022
PC Upload/Communcation Cable Part # 1313
Secondary Power Cable (110 volt) Part # 1316
AA Ni-MH Batteries Part # 10026
Battery Charger with 4 AA Ni-MH batteries (110 volt and slow charging) Part # 10034
Battery Charger Part # 10033
(no batteries included, 110 volt, and fast charging)

Regulatory

Safety: UL E236508
Emissions (EMI): FCC Part 15 Subpart B, Class A
Laser Safety: CDRH 21

Warranty

1 year manufacturer's defects warranty
(parts & labor)



Munazo Inc., KFM 10F, 6-9 Koyo-cho Naka, Higashinada-ku, Kobe 658-0032 Japan.

Tel: +81-78-857-5447 Fax: +81-78-857-5443 Email: munazo@munazo.jp - <http://en.munazo.us>